

(12) **UK Patent Application** (19) **GB** (11) **2 362 925** (13) **A**

(43) Date of Printing by UK Office **05.12.2001**

(21) Application No **0107797.3**

(22) Date of Filing **28.09.1999**

(30) Priority Data

(31) **9820923** (32) **28.09.1998** (33) **GB**

(86) International Application Data

**PCT/GB99/03033 En 28.09.1999**

(87) International Publication Data

**WO00/19066 En 06.04.2000**

(51) INT CL<sup>7</sup>

**F01L 7/16 7/10**

(52) UK CL (Edition S )

**F1B B2P11A B2P16 B2Q1C B2Q5A B2Q5D B2Q9**

(56) Documents Cited by ISA

**None**

(58) Field of Search by ISA

**NOT YET ADVISED**

(71) Applicant(s)

**BSA ROCV Limited  
(Incorporated in the United Kingdom)  
Speedwell House, West Quay Road,  
SOUTHAMPTON, SO15 1GY, United Kingdom**

(74) Agent and/or Address for Service

**Cruikshank & Fairweather  
19 Royal Exchange Square, GLASGOW, G1 3AE,  
United Kingdom**


(72) Inventor(s)

**Robert John Kennedy-Ping**

(54) Abstract Title

**Improvements in or relating to rotary valves**

(57) There is disclosed an improved rotary valve (5), and to an internal combustion engine including such a valve (5). In internal combustion engines use of poppet valves has predominated due to an inability of rotary valves to perform reliably without excessive oil consumption. However, the invention provides an improved valve (5) for use with an internal combustion engine (10) comprising at least one cylinder (15) having a reciprocable piston (50), the valve (5) comprising a valve seat (20) having at least one inlet (80) and/or at least one outlet (90), a rotatable valve member (60) mountable within the valve seat (20) at a compression end of one of the at least one cylinders (15) and having at least one orifice (70) extending therethrough between the valve seat (20) and an interior of the cylinder (15), wherein there is provided a seal member(s), (25a, 25b, 25c) between the valve member (60) and the at least one inlet (80) and/or the at least one outlet (90).

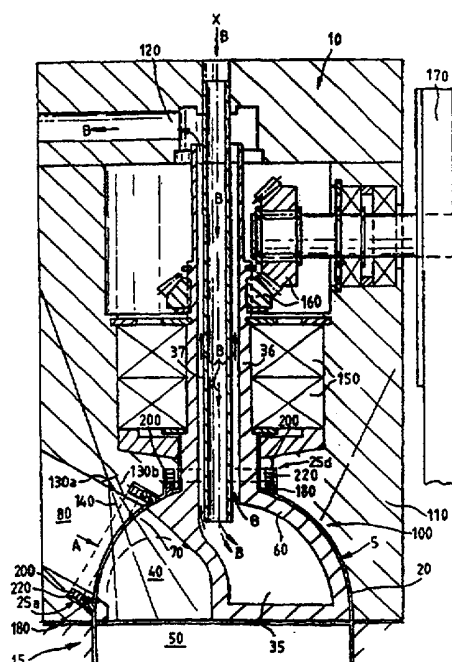

**GB 2 362 925 A**